


319.00 EUR
incl. 19% VAT, plus [shipping](#)

- For D315AO !
- For D317AO !
- Extension !

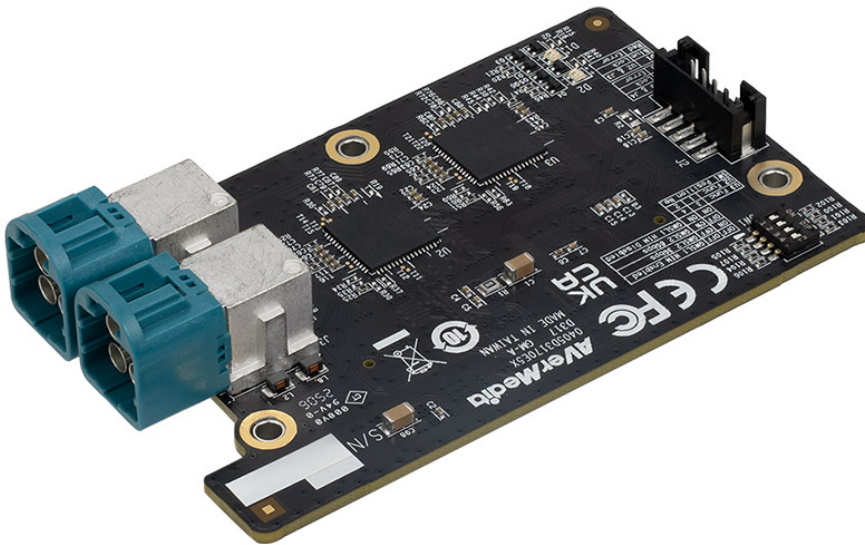

- 2x Mini FAKRA to support 8x GMSL camera (Via FAKRA cable)
- POC (Power-Over-COAX)
- 120pin Board to Board Connector

Applicable product	D317 / D315
Deserializer	Maxim 96712
Product Type	120pin Camera Expansion Header Board to Board daughter board
MIPI Output	1 x 4-lane MIPI CSI-2 v1.3 output from each Deserializer (16-lanes total)
Camera Input Connectors	Via 120pin camera expansion board to board connector 2x Mini FAKRA A Type
POC (Power-Over-COAX)	•Option: Breakout cables to FAKRA available (MKA4FZ-174U-FKMZ1-23-01)
Power	All 8 cameras will be sourced Power-Over-COAX from D317 can be directly powered from Camera Expansion Header / External +12V Input
Mechanical	Dimensions: 80.8mm x 49mm (TBD) Operating temperature: -40°C to 85°C (TBD)
Temperature	Storage temperature -40°C ~ 85°C (TBD) Relative humidity 40 °C @ 95%, Non-Condensing